

1st DOWN[®]

STAIN-RESISTANT SEAL/SPECIALTY COATING

Buckeye[®]

1st Down[®] is a semi-permanent undercoating for Buckeye floor finishes. It may also be used alone as a sealer/top coat combination on non-resilient floors (quarry tile, brick, concrete, terrazzo, etc.)

1st Down[®] protects floors from dirt penetration

Resists stains and detergents - extends intervals between strip outs


Dries water clear - keeps floors looking newer longer

Versatile - for use on resilient and hard floor surfaces

Low odor - eliminates exposure to objectionable fumes

Slip resistant - U.L. listed as to slip resistance

Self leveling - can be applied easily and with confidence

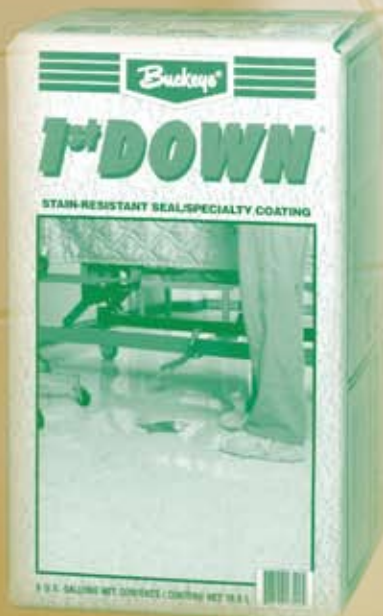

Resilient Floors	Hard Surface Floors	Masonry Floors
✓ Vinyl	✓ Terrazzo	✓ Concrete
✓ Vinyl Composition	✓ Slate	✓ Quarry Tile
✓ Linoleum	✓ Marble	✓ Stone
✓ Asphalt	✓ Travertine	✓ Brick

Buckeye International, Inc.

2700 Wagner Place • Maryland Heights • Missouri 63043 • 314/291-1900
www.buckeyeinternational.com

1st DOWN[®]

Buckeye[®]

STAIN-RESISTANT SEAL/SPECIALTY COATING

FLOOR PREPARATION

1. Strip floor thoroughly using Buckeye **Revelation[®]** or **Juggernaut[®]**.
2. Pick up stripper solution and rinse floor with clean water until no residue remains.
3. Allow floor to dry before coating application.

APPLICATION

1. Use a clean synthetic mop and a clean bucket and wringer.
2. Saturate the mop and press firmly into the wringer to remove excess seal.
Do not wring the mop.
3. Apply **1st Down[®]** using an overlapping figure-eight motion.
4. Allow floor to dry (usually 20 to 30 minutes).
5. When using as a base coat for Buckeye floor finish, two coats are recommended.
When using as a specialty coating, apply a minimum of three coats.
Always allow floor to dry thoroughly between coats.

MAINTENANCE

1. Dust floor with untreated dust mop.
2. Damp mop as required, using **Buckeye Blue All-Purpose Cleaner** or **Straight-Up[®] pH Neutral Cleaner**.
3. Top scrub and recoat as needed.

Available in: 4 x 1 gallon cases, 5-gallon Action Pacs[®], 55-gallon drums and 260-gallon Mega Pac[™].

Total Solids (105°F)...	16.2 ± 0.2
pH Concentrate...	8.2 ± 0.2
Leveling...	Excellent
Freeze/Thaw Stability	Pass 3 Cycles
Drying Time...	20-30 Minutes
Flash Point...	None
Film Color...	Clear
Weight/Gallon	8.58 lbs.



1st Down[®] is not for use on floors subjected to standing water.

Buckeye International, Inc.

2700 Wagner Place • Maryland Heights • Missouri 63043 • 314/291-1900
www.buckeyeinternational.com