


# CITATION<sup>®</sup>

Buckeye<sup>®</sup>

**Citation**<sup>®</sup> maintains its beautiful high gloss with a minimum of maintenance time. Regardless of the maintenance program, equipment, or timetable you're working with, **Citation** keeps its good looks.

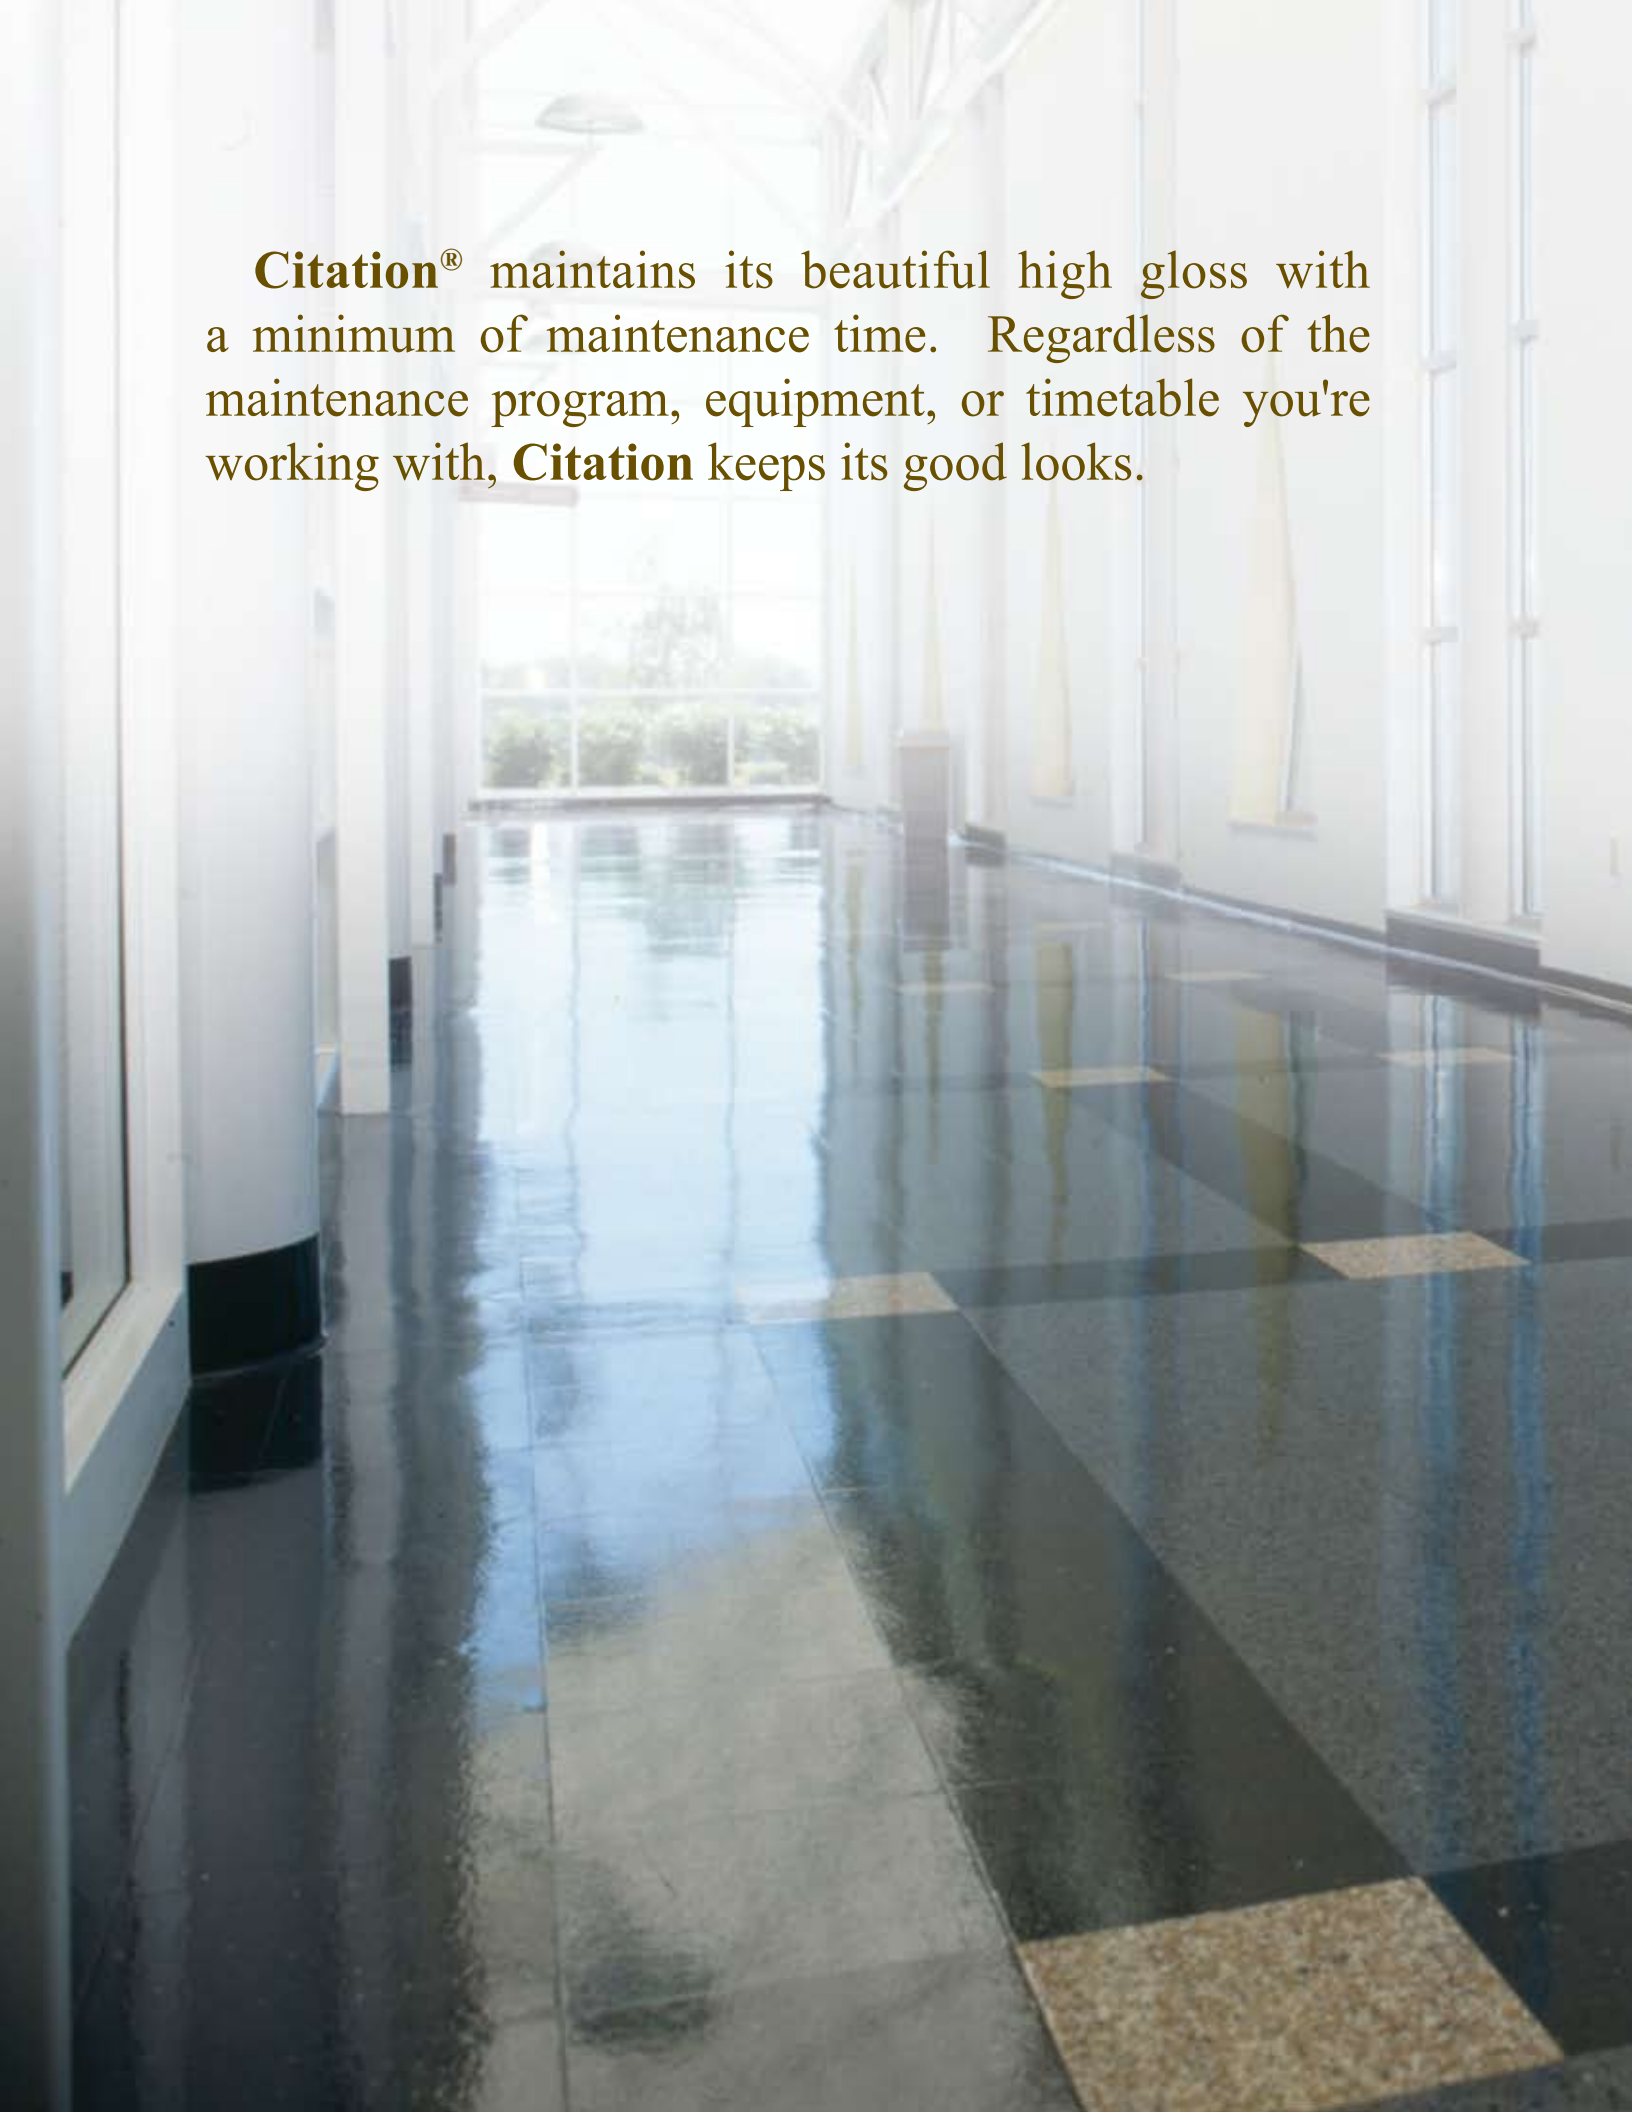

### *Easy to Apply*

- ✦ **Self-Leveling** - Coats apply easily
- ✦ **Dries Rapidly** - Saves \$\$ in labor time
- ✦ **Builds To a Radiant Gloss**

### *Highly Durable*

- ✦ **Non-Powdering** - Finish stays intact to last longer
- ✦ **Non-Yellowing** - Extends stripping intervals, reducing labor cost
- ✦ **Holds Up Under Extreme Conditions**

### *Easy to Maintain*

- ✦ **Does Not Require Buffing**
- ✦ **Detergent Resistant** - Holds up under repeated moppings
- ✦ **Resists Scuffs** - Floors look better longer

### *Very Versatile*

- ✦ **Resilient Floors** - Vinyl, rubber, asphalt, vinyl composition tile
- ✦ **Hard Floors** - Terrazzo, slate, marble, concrete, quarry tile
- ✦ **Can be Buffed at Any Speed**



## Floor Preparation:

1. Strip floor thoroughly, using Buckeye **Revelation**® or another recommended Buckeye stripper according to directions.
2. Pick up spent solution with mop or wet vacuum as soon as each floor section has been stripped. Do not allow solution to dry.
3. Rinse floor thoroughly with clear water. Change rinse water frequently to prevent redepositing of dirt and stripper residue.
4. Allow floor to dry thoroughly before applying Buckeye **Citation**®.



## Application:

1. Use a clean rayon mop reserved only for floor finish application.
2. Use a clean bucket and saturate mop thoroughly. Press firmly into wringer to remove excess finish. Do not wring.
3. Apply **Citation**. Excellent results are obtained by applying even coats.
4. Allow each coat to dry thoroughly, usually 20 to 30 minutes under normal humidity conditions.

## Maintenance:

1. Dust mop floor with a Buckeye **Aqua Dust**™ treated dust mop.
2. Damp mop as required, using Buckeye **Straight-Up**® at 1:64 (2 oz/1 gal. water).
3. If desired, spray buff **Citation** with Buckeye **Equity**™ or Buckeye **R.P.M.**™ (see data sheets for specific instructions) or dry buff.

### Available in:



## Technical Specifications

pH	8.4 ± 0.2
Excellent	Leveling
Pass 3 Cycles	Freeze/Thaw Stability
Excellent	Removability
20-30 Minutes	Drying Time
Excellent	Black Mark Resistance
Water Clear	Film Color
Excellent	Scrubability
8.6 lb	Wt./Gallon
UL Classified	Slip Resistance



## Buckeye International, Inc.

2700 Wagner Place • Maryland Heights • MO 63043 • USA • (314) 291-1900  
www.buckeyeinternational.com